





Vibranon® F45

t = 50mm

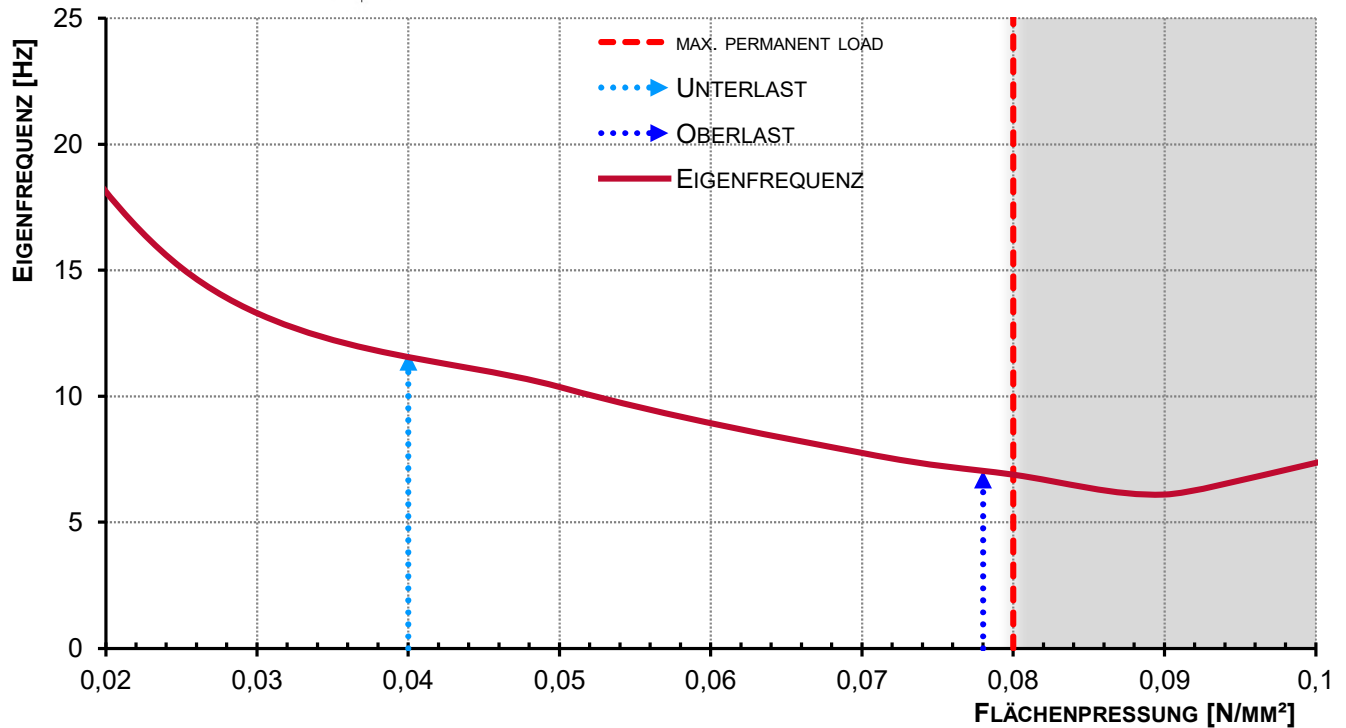

Angaben:


Angaben:		Unterlast	Oberlast		Unterlast	Oberlast
Flächenpressung	$[N/mm^2]$	0,040	0,078	Eigenfrequenz [Hz]	11,7	7,1
				Isolationswirkung [Hz]	17	10
C _{dyn}	$[N/mm^3]$	0,0221	0,0156	Verformung [mm]	5	13
C _{stat}	$[N/mm^3]$	0,0088	0,0061	Federweg dyn. [mm]	8,2	
C _{dyn}	$[N/mm^2]$	1,1074	0,7809			
C _{stat}	$[N/mm^2]$	0,4390	0,3054			

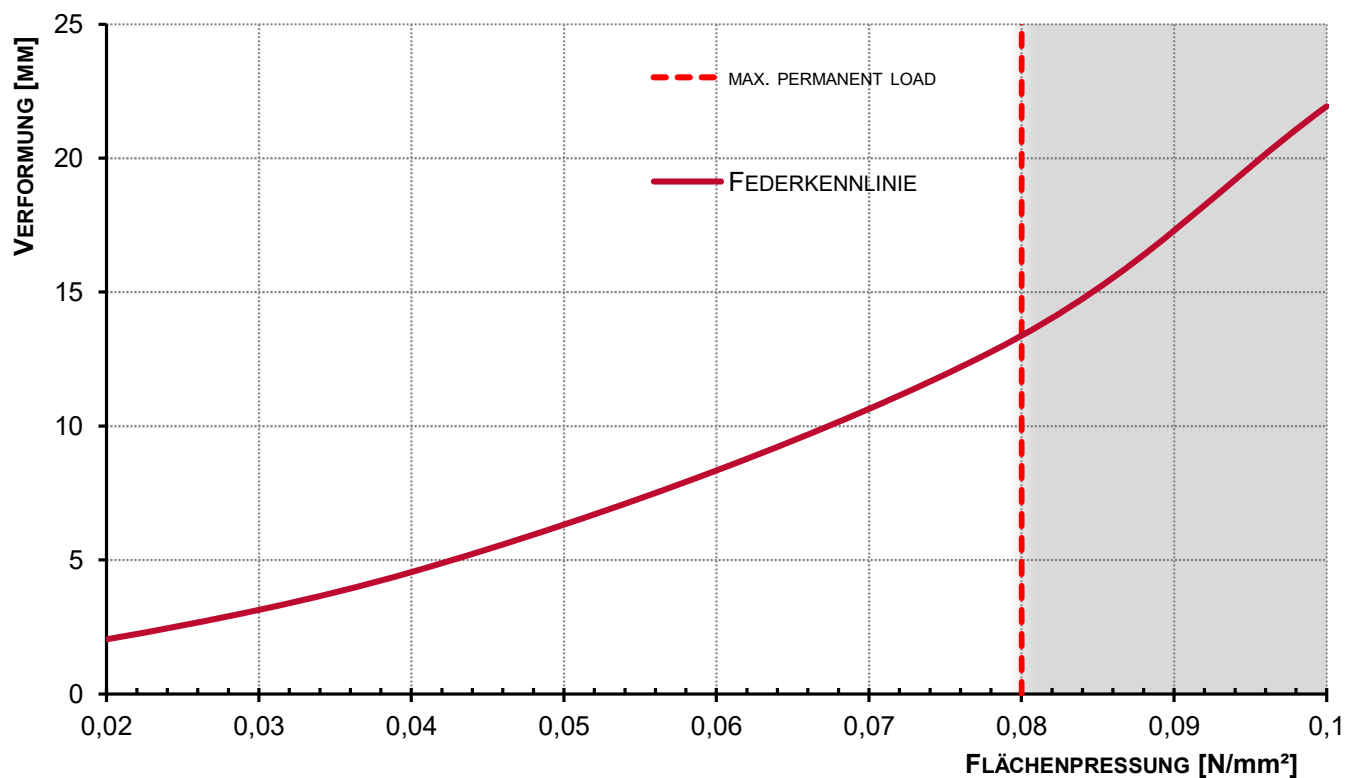



Vibranon® F45
t= 50mm

ISOLIERUNG

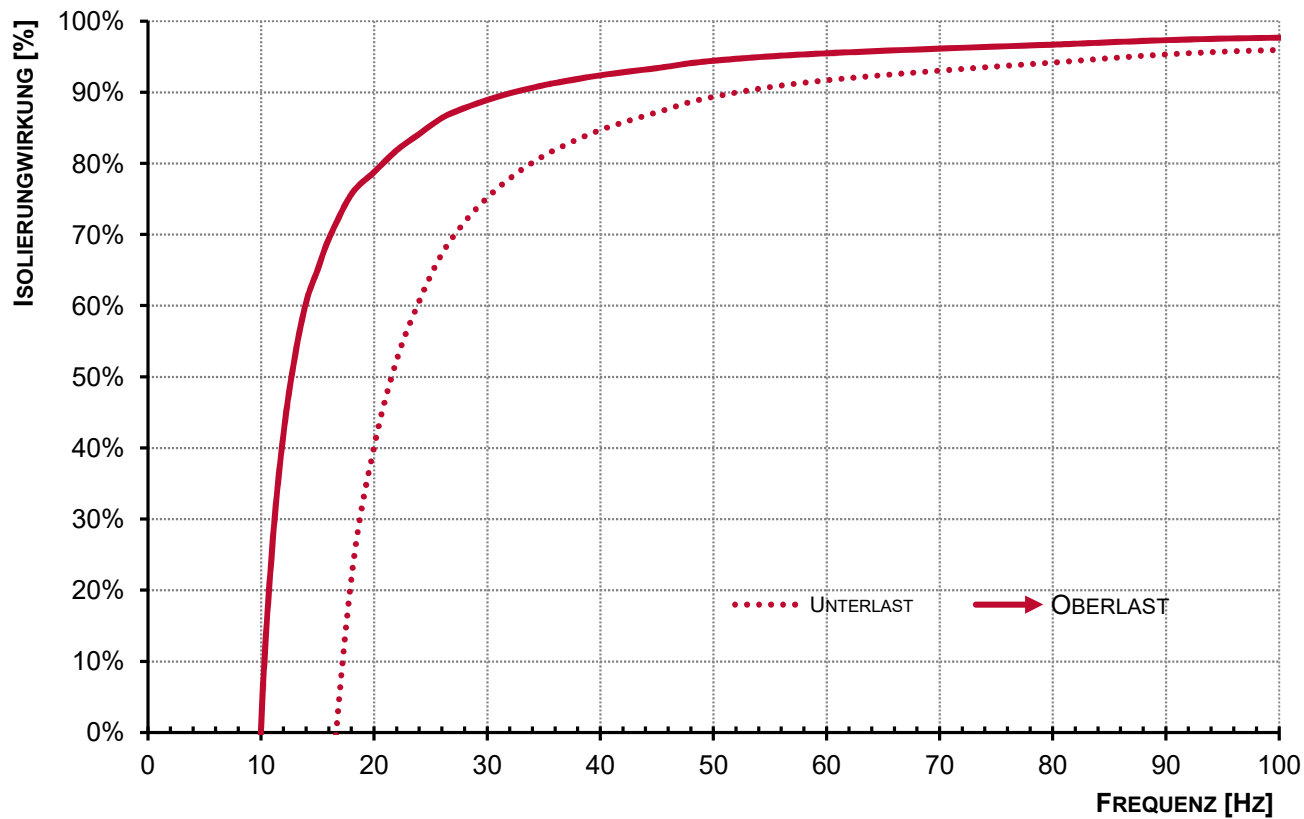

DÄMMUNG

